

MD6004 CAMERA HOUSING

PRODUCT FEATURES

- Stainless steel material
- Type A for zoom lens camera
- Type B for fixed lens camera
- Type C for camera with wiper and sunshield
- Optional auto-heating
- Applied in great change atmospheres
- Tough steel glass for window
- Housing back with 2 or 3 outlets
- Indoor and outdoor installation for all weather use
- IP68

Type A/B



Type C



DESCRIPTION

MD6004 as a classical and matured monitoring product has been used stably for many years in

MD6004 inside could be fixed camera, zoom camera or integrated camera.

Stainless steel structure to satisfy all kinds of environment, working under -45°C to $+60^{\circ}\text{C}$ for longtime stably

24VAC or 220VAC power supply

Sunshield could efficiently reduce the temperature of equipment, wiper to ensure a clear window

Window adopts good steel glass to ensure a good picture quality

With two or three cable outlets, use steel tube to protect cable

Low temperature auto-heating optional

TYPE

MD6004-1A	Airproof, standard type
MD6004-1B	Airproof, small type
MD6004-2A	Airproof, dustproof (standard type)
MD6004-2B	Airproof, dustproof (small type)
MD6004C	All-weather, with sunshield and wiper

RELATED EQUIPMENTS

FSYT	Airproof pan/tilt
KJ2028S	Airproof decoder controller



CHANGZHOU YUHUA ELECTRIC EQUIPMENT MANUFACTURING CO.LTD
ADDRESS: NO 60 HEHUAN ROAD, ZHONGLU DEVELOPMENT ZONE, CHANGZHOU JIANGSU, CHINA
TEL: 86-519-3978591 POSTAL: 213023
FAX: 86-519-3978970 WEB: <http://www.cyh.com.cn>

2006.10 VER: 1.1



MD6004 CAMERA HOUSING

MECHANICAL

Material	Stainless steel 1Cr18Ni9Ti or 316L
IP	IP68
Inner size	
MD6004-1A/2A	260(L) x 80(H) x 60(W) mm
MD6004-1B/2B	190(L) x 70(H) x 50(W) mm
MD6004C	260(L) x 90(H) x 70(W) mm
Viewing window	8mm thick
View window area	Φ66mm
Wind mouth size	3/8" screw
Wind pressure	0.1~0.3Mpa
Weight	
MD6004-1A	6Kg / 8Kg
MD6004-1B	4Kg / 6Kg
MD6004-2A	6Kg / 8Kg
MD6004-2B	5Kg / 7Kg
MD6004C	9kg / 11Kg
Cable outlet qty	
MD6004A/B	2
MD6004C	3
Outlet type	G-3/4"
Installation	Pan/tilt, half-fixed pan/tilt, fixed bracket


ELECTRIC

Input voltage	220VAC/24VAC, 50/60Hz
Voltage scope	±10%
Working current	≤0.5A
Heater(optional)	To setup while it is -10℃ ±5℃
Wiper	220VAC/50Hz or 24VAC/50Hz
Power consumption	30W with heater
Electric connection	2-core for power 4-core for lens 4-core for wiper 1 video cable

ENVIRONMENTAL

Air pressure	86~106KPa
Temperature	-45℃~+60℃
Humidity	≤95%RH(+25℃)


DIMENSIONS

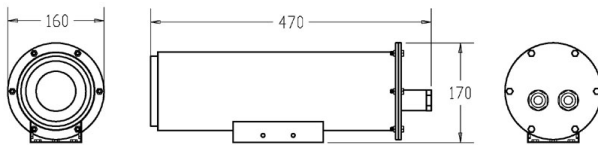


Type 1A face view Type 1A side view Type 1A back view




Type 1B face view Type 1B side view Type 1B back view

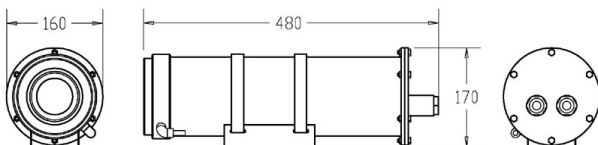

Type 2A face view Type 2A side view Type 2A back view

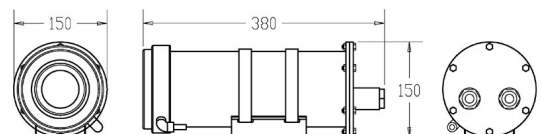


Type 2B face view Type 2B side view Type 2B back view

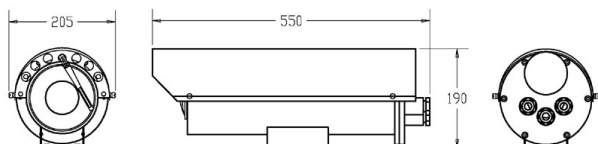

Type C face view Type C side view Type C back view

MOUNTING SIZE

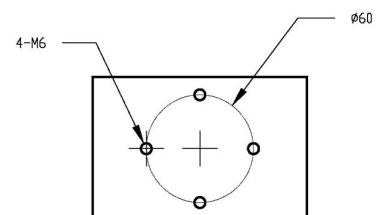

Bottom mount hole

Unit : mm.